



DLPlus mini-trunking 32 x 16 and 40 x 20 profiles and finishing accessories

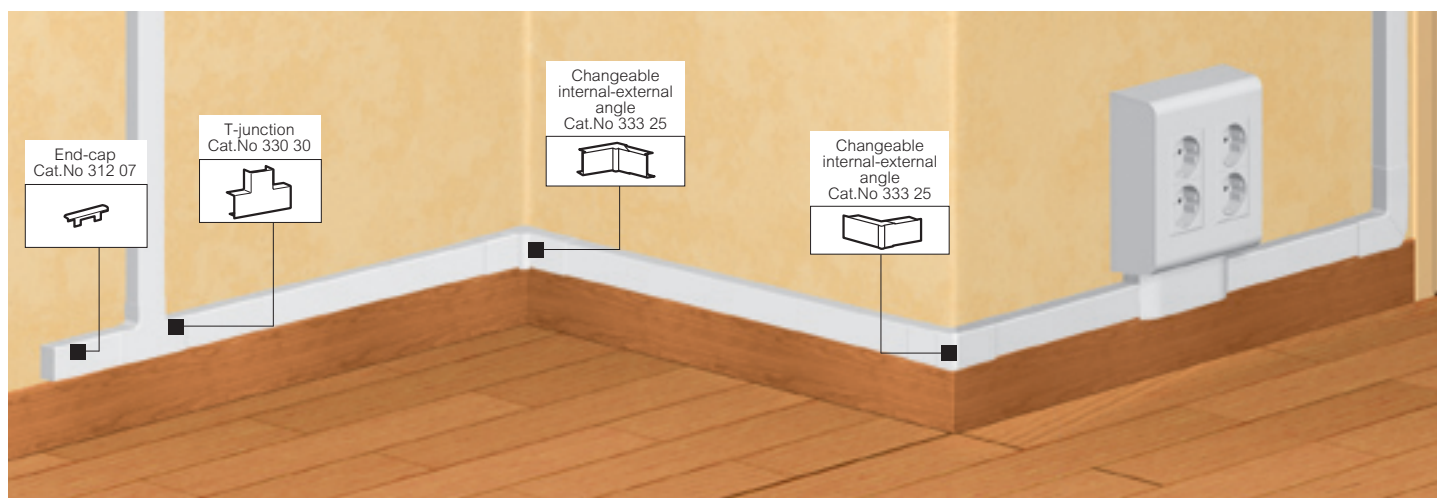

Selection chart (p. 852-853)
Wiring capacity chart (p. 858)

Pack	Cat.Nos	Mini-trunking with cable grip
60 48	32 x 16 308 04⁽¹⁾ 40 x 20 300 27⁽¹⁾	EN 50085-2-1 approved Equipped with an integrated device for holding cables in place Without central partition Length 2.10 m



Pack	Cat.Nos	Finishing accessories
10	32 x 16 312 07 40 x 20 312 11	End cap
10	32 x 16 333 25 40 x 20 302 81	Changeable internal-external angle
10	32 x 16 333 27 40 x 20 302 83	Changeable flat angle
20	32 x 16 336 04 40 x 20 336 06	Cover joint
10	32 x 16 333 30 40 x 20 302 08	Flat T-junction

Pack	Cat.Nos	Special frames
10	32 x 16 314 56 40 x 20 314 08	1 gang
5	32 x 16 314 66 40 x 20 314 18	2 gang

Special frames

Supplied with end cap and divider for separation of currents

Installation alongside the mini-trunking

For vertical or horizontal mounting of surface mounting wiring accessories (p. 859)

Pack	Cat.Nos	Adaptors
10	32 x 16 316 41 40 x 20 316 47	Adaptors for mounting Mosaic frames at end of the mini-trunking For 32 x 16 and 40 x 20 mini-trunking
10	32 x 16 317 04 40 x 20 317 07	Adaptors for mounting Mosaic frames alongside the mini-trunking For Mosaic frames Cat.Nos 316 11 and 316 12
5	32 x 16 317 05 40 x 20 317 08	For Mosaic frames Cat.Nos 316 13 and 316 21
5	32 x 16 317 06 40 x 20 317 09	For Mosaic frames Cat.Nos 316 14 and 316 22

Connection of luminaires (p. 857)

Junction boxes (p. 857)

Frames for wiring accessories (p. 857)

(1) Number of metres in pack