


RCBO DX™ 6000 - 10 kA and DX™ 10000

residual current breaking overload from 3 A to 63 A - C curve, AC and A types

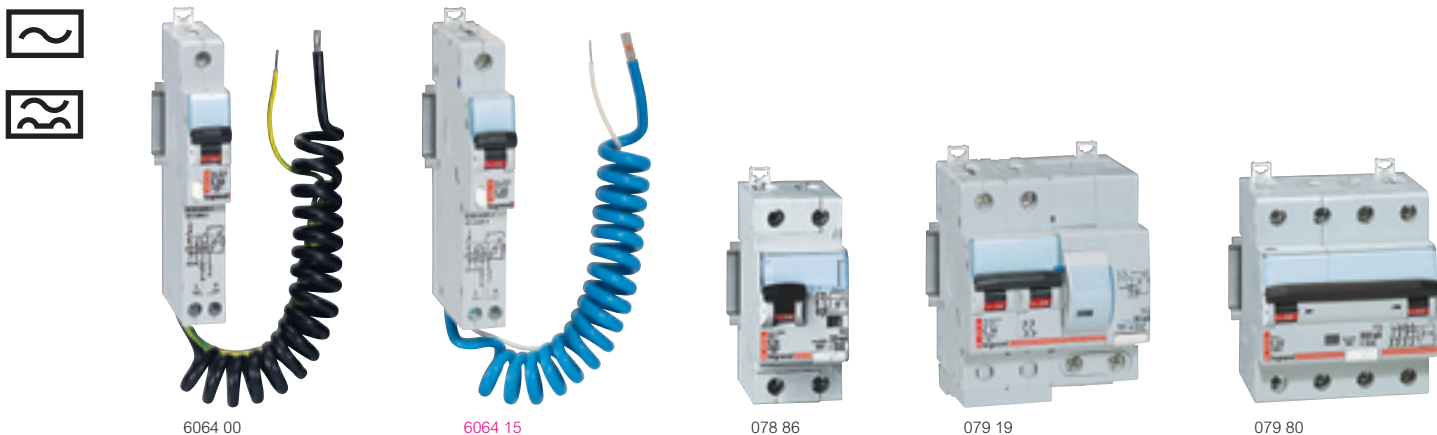

Dimensions (p. 183)
 Technical characteristics (p. 156-158)

Breaking capacity:
 [10000] - IEC 61009-1 - for single pole
 [6000] - IEC 61009-1 - 6 kA / IEC 60947-2 for single pole + neutral
 [6000] - IEC 61009-1 - 10 kA / IEC 60947-2 for 2 and 4 pole
 • AC type: detect AC component faults
 • A type: detect AC and DC component faults

Pack	Cat.Nos	Single pole - 230 V~	
		AC type	30 mA
		Nominal rating (A)	Number of modules
1	6064 00	10	1
1	6064 01	16	1
1	6064 02	20	1
1	6064 03	25	1
1	6064 04	32	1
1	6064 05	45	1

Pack	Cat.Nos	Single pole + neutral - 230 V~	
		Neutral on right-hand side	
		AC type	10 mA
		Nominal rating (A)	Number of modules
1	078 79	16	2
		AC type	30 mA
		Nominal rating (A)	Number of modules
1	078 81	3	2
1	078 83	6	2
1	078 84	10	2
1	078 86	16	2
1	078 87	20	2
1	078 88	25	2
1	078 89	32	2
1	078 90	40	2
		AC type	300 mA
		Nominal rating (A)	Number of modules
1	078 94	6	2
1	078 95	10	2
1	078 97	16	2
1	078 98	20	2
1	078 99	25	2
1	079 00	32	2
1	079 01	40	2
		A type	10 mA
		Nominal rating (A)	Number of modules
1	085 75	16	2
		A type	30 mA
		Nominal rating (A)	Number of modules
1	085 79	6	2
1	085 85	10	2
1	085 87	16	2
1	085 88	20	2
1	085 89	25	2
1	085 90	32	2
1	085 91	40	2

Pack	Cat.Nos	2-pole - 230/400 V~	
		AC type	10 mA
		Nominal rating (A)	Number of modules
1	077 45	10	4
1	077 46	16	4
1	077 47	20	4

Pack	Cat.Nos	2-pole - 230/400 V~ (continued)	
		AC type	30 mA
		Nominal rating (A)	Number of modules
1	079 11	10	4
1	079 19	16	4
1	079 20	20	4
1	079 21	25	4
1	079 22	32	4
1	079 29	40	4
1	079 30	50	4
1	079 31	63	4
		AC type	300 mA
		Nominal rating (A)	Number of modules
1	079 44	10	4
1	079 46	16	4
1	079 47	20	4
1	079 48	25	4
1	079 49	32	4
1	079 50	40	4
1	079 51	50	4
1	079 52	63	4

Pack	Cat.Nos	4-pole - 400 V~	
		AC type	30 mA
		Nominal rating (A)	Number of modules
1	079 62	10	4
1	079 64	16	4
1	079 65	20	4
1	079 66	25	4
1	079 67	32	4
1	080 13	40	7
1	080 14	50	7
1	080 15	63	7
		AC type	300 mA
		Nominal rating (A)	Number of modules
1	079 75	10	4
1	079 77	16	4
1	079 78	20	4
1	079 79	25	4
1	079 80	32	4
1	080 31	40	7
1	080 32	50	7
1	080 33	63	7
		A type	30 mA
		Nominal rating (A)	Number of modules
1	080 75	10	4
1	080 76	16	4
1	080 77	20	4
1	080 78	25	4
1	080 79	32	4
		A type	300 mA
		Nominal rating (A)	Number of modules
1	080 84	10	4
1	080 85	16	4
1	080 86	20	4
1	080 87	25	4
1	080 88	32	4

Red catalogue numbers : New products